





CompactDirect

A combination from the Schletter unit assembly system Safe and stable

- · Swift assembly
- · Centric load transmission
- · Stable aluminum construction
- · Inexpensive module elevation
- Several combination options

Description

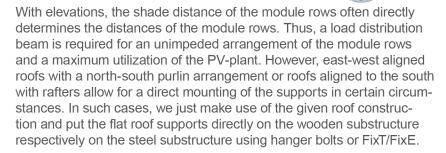

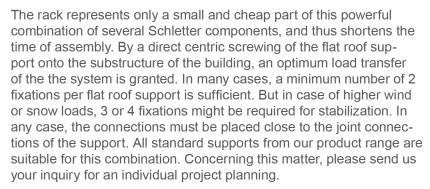

Application hints

- In case of lateral inclination of the module rows, please use diagonal struts
- The screwing in the corrugation top area or the "upper wave" area
 of the roof cladding is recommendable regarding the water flow
 (water tightness!); It might be necessary to relocate the drilling
 holes. If the drilling is done in the "lower wave" resp. corrugation
 bottom area, an extra sealing has to be provided!
- Please also pay regard to our documentation "mounting and project planning" and "flat roof mounting - general hints"
- Please also consider our product sheet "support program07"
- · All supports are available in any desired angle
- · A chart for structural analysis is available for all support designs
- In critical cases with extreme wind loads, it can bring about structural advantages to equip the supports with wind deflectors (WindSafe system)

We will be glad to advise you!















地址: 香港九龍旺角彌敦道610號荷李活商業中心18樓

電話: 2960 0193 郵箱: cmli@live.hk

傳真: 2960 0553 網址: http://www.hkre.com.hk/