

8A8DLTP-DEKA

SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	250Ah
Capacity at C/20	245Ah
Weight	163 lbs. (74 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-40°F (-40°C) - 140°F (60°C)



Vent Self-sealing

Terminal T (T975)



Rated UN2794 - Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

Valve-Regulated, Absorbed Glass Mat Technology



DIMENSIONS


Inches (mm)

Length **21.03 (534 mm)**
Including handles

Width **11.00 (279 mm)**

Height **10.82 (275 mm)**
Including terminals

AGM Cycle Life vs. Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity

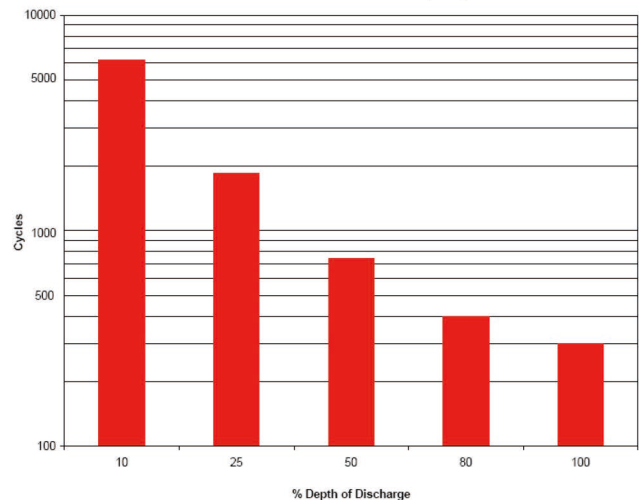

Authorized Agent:



香港可再生能源有限公司
Hong Kong Renewable Energy Co. Ltd.

地址：香港九龍旺角彌敦道610號荷李活商業中心18樓

電話：2960 0193

郵箱：cmli@live.hk

傳真：2960 0553

網址：<http://www.hkre.com.hk/>