

8G4DLTP-DEKA

SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	210Ah
Capacity at C/20	183Ah
Weight	127.5 lbs. (58 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)



Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	T (T975)



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:

Valve-Regulated, Gelled-Electrolyte Battery




DIMENSIONS

Inches (mm)

Length	20.77 (528 mm)
Width	8.43 (214 mm)
Height	11.12 (282 mm) <i>Including terminal</i>

Gel Cycle Life vs Depth of Discharge at 25°C (77°F)
Based on BCI 2-hour Capacity

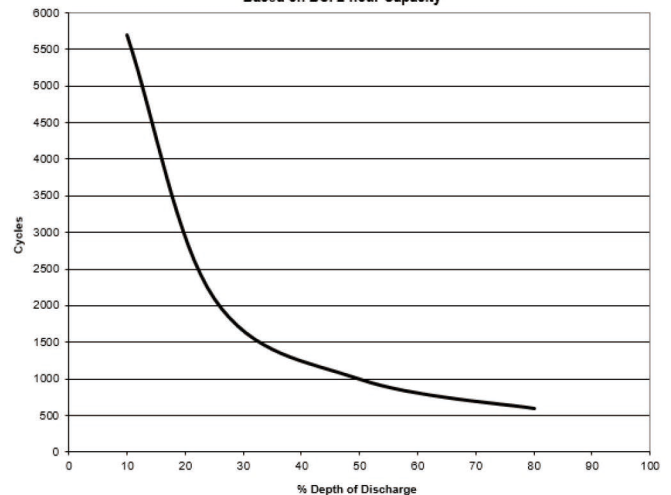

Authorized Agent:



香港可再生能源有限公司
Hong Kong Renewable Energy Co. Ltd.

地址：香港九龍旺角彌敦道610號荷李活商業中心18樓

電話：2960 0193

郵箱：cmli@live.hk

傳真：2960 0553

網址：<http://www.hkre.com.hk/>