

8G8DLTP-DEKA

SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	265Ah
Capacity at C/20	225Ah
Weight	157 lbs. (71 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)



Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	T (T975)



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:


Valve-Regulated, Gelled-Electrolyte Battery



DIMENSIONS

Inches (mm)

Length	20.44 (519 mm)
Width	10.97 (279 mm)
Height	11.25 (286 mm) <i>including terminal</i>

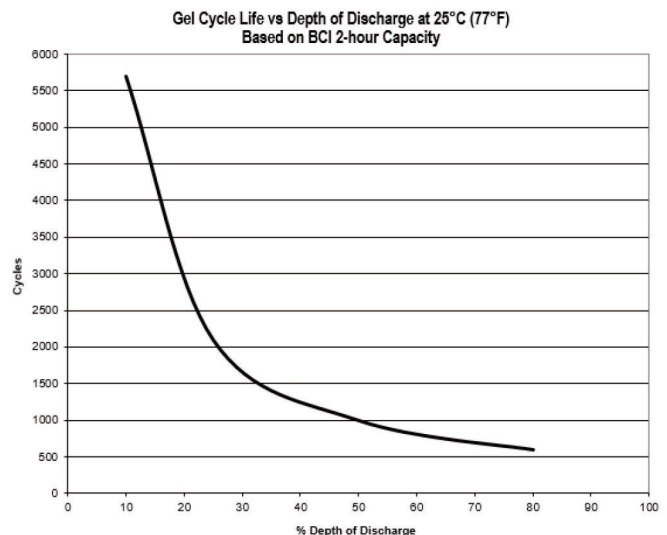

Authorized Agent:



香港可再生能源有限公司
Hong Kong Renewable Energy Co. Ltd.

地址：香港九龍旺角彌敦道610號荷李活商業中心18樓

電話：2960 0193

郵箱：cmli@live.hk

傳真：2960 0553

網址：<http://www.hkre.com.hk/>