

Authorized Agent:



香港可再生能源有限公司
Hong Kong Renewable Energy Co. Ltd.



Hong Kong Solar Polycrystalline Solar Module

HKS 20W

36 CELL

Poly Crystalline Module

12.00%

Maximum Efficiency

20W

Power Output Range

0/+5%

Positive Power Tolerance



ISO9001:2008
ISO14001:2004



Function Features



Withstanding Harsh Environment

Reliable quality leads to a better sustainability even in harsh environment like desert, farm and coastline.



High Efficiency

High module conversion efficiency (up to 12.00%), through innovative manufacturing technology.



Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



Low-light Performance

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.



Higher Quality Assurance

100% EL test before and after lamination, and finished products EL test, providing higher quality assurance.




Maximized Energy Harvest

Impedance matching technology eliminates mismatch losses, more power from each module bin.


LINEAR PERFORMANCE WARRANTY

10-Year Product Warranty

25-Year Linear Power Warranty

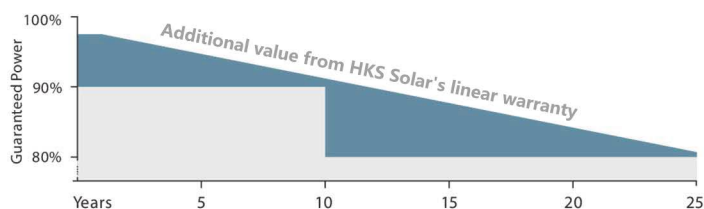

Engineering Drawings

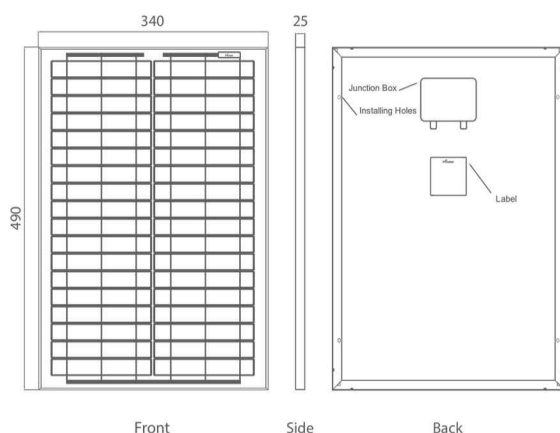


Packaging Configuration


(One box=One pallet)

120pcs/box, 63 pallets, 7560pcs/40'GP Container

Current-Voltage Curves

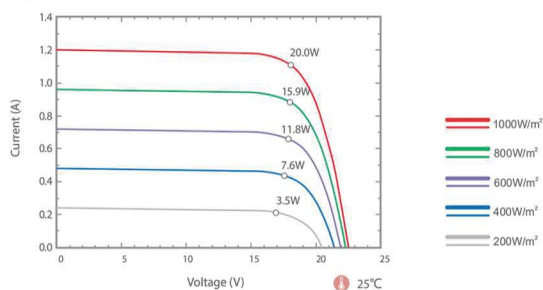

Power-Voltage Curves

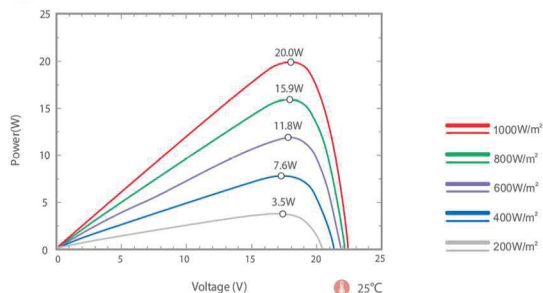

Technical Specifications

Model	HKS 20W	
Electrical Characteristics		
	STC	NOCT
Maximum Power (Pmax)	20Wp	15Wp
Maximum Power Voltage (Vmpp)	18.0V	16.8V
Maximum Power Current (Impp)	1.11A	0.90A
Open Circuit Voltage (Voc)	22.5V	21.2V
Short Circuit Current (Isc)	1.20A	1.00A
Power Tolerance(Positive)	5%	
Module Efficiency STC	12.00%	
Operating Temperature Range	-40°C to +85°C	
Maximum System Voltage	715V	
Series Fuse Rating	8A	
Temperature Coefficient of Pmax	-0.44 %/°C	
Temperature Coefficient of Voc	-0.33 %/°C	
Temperature Coefficient of Isc	0.055 %/°C	
Nominal Operating Cell Temperature(NOCT)	45±2°C	
Mechanical Characteristics		
Cell Type	Polycrystalline 156x156 mm	
Cell Number	36 (4x9)	
Dimensions (mm)	340x490x25	
Weight(Kgs)	2.00	
Front Glass	3.2 mm, High Transmission, Low Iron,Tempered Glass	
Frame Type	Anodized Aluminium Alloy	
Junction Box Protection Class	IP 67 Rated	
Connector Type	DC Connector	
Output Cables	0.75 mm², Length: 5000 mm	

STC: Irradiance 1000W/m²

Cell Temperature 25°C

AM=1.5

NOCT: Irradiance 800W/m²

Ambient Temperature 20°C

AM=1.5

Wind Speed 1m/s

Authorized Agent:

香港可再生能源有限公司
Hong Kong Renewable Energy Co. Ltd.

地址: 香港九龍旺角彌敦道610號荷李活商業中心18樓

電話: 2960 0193

郵箱: cmli@live.hk

傳真: 2960 0553

網址: <http://www.hkre.com.hk/>